

PXR-34MSKL Reader



Features

- Conforms to ISO 14443A standard, supporting Mifare card
- Unique ID or Block read format supported and programmable key value.
- Provides RS-485 communication interface for long distance installation.
- Keypad function. When working with controller, it provides unlock modes including card-swiping, keypad-pressing or card-swiping with password to unlock door
- LCD displays date, day of week, time and reader's status
- Auto-Learning function. Auto memory of 470 cards' capacity to temporarily work as standalone operation mode once the reader disconnects from the control panel
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.


Ordering Information

Package Content:

- PXR-34 x 1
- Plate x 1
- Quick Start Guide x 1
- Accessory Pack x 1

Model No. Identification

P X R - 3 4 M S K L

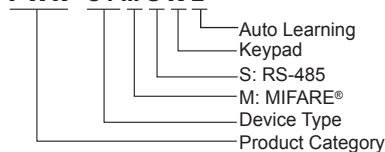

Color



Dark Grey
(DG)

Specifications

Model No.	PXR-34MSKL
Read Format	Mifare (13.56 MHz)
Read Range	3-5 cm(max)
Comm. Interface	RS-485
Keypad	16 Keys (F1-F4,0-9, CE, Enter)
Input Ports	3 Sensors (Door Sensor x 1 \ Exit Button x 1 \ Case Sensor x 1)
Output Ports(External)	O.C. Output x 2 (Door Lock / Alarm, external ACU-30/90)
ID Setting	DIP switch
Comm. Baudrate	19,200 bps-N-8-1
LCD Display	122 x 32 Dot. Graphic Display
LED Indicator	Power / Comm.
Beep Tone	Buzzer
Power Input	DC 12V / 1A
Current Consumption	300mA (max)
Operating Temp.	0°C~ 55°C / 32°F~ 131°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimensions (LxWxH)	140 x 65 x 25 (mm)