

PXR-92MWS-BE Bluetooth Reader



For Android




For iOS

Please scan QR Code to download mCard App

Features



- Conforms to ISO 14443A, supporting Mifare card.
- Supports Bluetooth (BLE) or NFC; Installing Hundure mCard App on mobile phone and using the Bluetooth or NFC functions to unlock doors.
- MIFARE unique ID or Block read format supported and programmable key value.
- Provides dual interface (Wiegand and RS-485) model to meet different project requirements and reduce inventory costs.
- IP65 rated ingress protection, suitable to install indoor and outdoor environments.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.

Ordering Information

Package Content: <ul style="list-style-type: none"> · PXR-92 x 1 · Quick Start Guide x 1 · Accessory Pack x 1 · Plate x 1 	
Model No. Identification P X R - 9 2 M W S - B E <ul style="list-style-type: none"> P: Product Category X: Device Type R: Mifare 9: Wiegand & RS-485 2: Comm. Interface M: Bluetooth W: Bluetooth S: BE E: BE 	Color  Black (BL)

Specifications

Model No.	PXR-92MWS-BE
Read Format	Mifare (13.56 MHz); Bluetooth (Android 5.0+ / iOS 10.2+ Bluetooth phone) – need to work with mCard App. NFC (Android 5.0+ NFC phone) – need to work with mCard App
Card Read Range	3-5 cm(max)
BLE Read Range	At least 60cm under normal environment
Comm. Interface	Wiegand & RS-485
Input Port	Case Sensor x 1
ID Setting	DIP switch setting
Comm. Baudrate	19,200 bps-N-8-1
LED Indicator	Power / Comm.
Beep Tone	Buzzer
Ingress Protection	IP 65
Power Input	DC 12V / 1A
Current Consumption	300mA (max)
Operating Temp.	-10°C~ 70°C / 14°F~ 158°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimension (LxWxH)(mm)	120 x 77 x 22

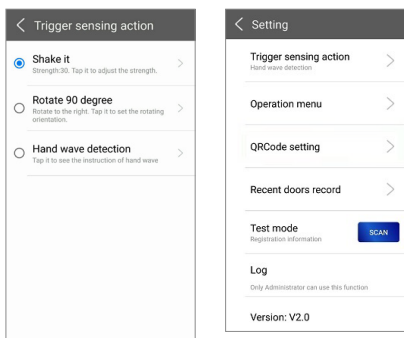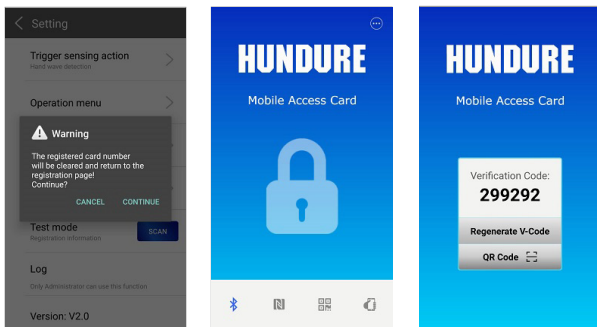

* Product design and specifications are subject to change without prior notice.