

PXR-92 EM Keypad Reader



Features


- Support 125 KHz-EM card
- Reading distances are around 8~10 cm
- Slim, stylish design, sensitive touch keypad with blue backlight.
- Keypad function. When work with controller, it provides swipe card, press card number by keypads or card with password to access.
- Case sensor detection function
- Watchdog function secures system free from halting
- Provide different communication interface with controller.
- Special model to providets both T2 and Wiegand interface, it allow customer to use more flexible.(PXR-92ETWK)
- Provide RS-485 communication interface, it may suit for long distance installation.(PXR-92ESK)
- IP65 waterproof and dustproof testing, easy to install indoor and outdoor environments.
- Wide operation temperature range, it can be install in different arctic or tropical regions.

Ordering Information

Package Content:

- PXR-92 x 1
- Accessory Pack x 1
- Quick Start Guide x 1
- Plate x 1

Model No. Identification

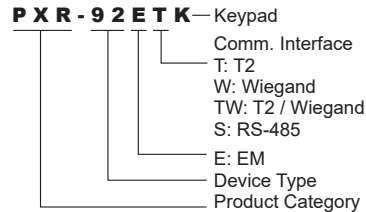

Color

- Black (BL)

Specifications

Model No.	PXR-92ETWK	PXR-92ESK
Read Format	125 KHz (EM Compatible)	
Read Range	8-10 cm(max)	
Comm. Interface	T2 / Wiegand	RS-485
Keypad	12 Key(0-9, *, #)	
Input Port	Case Sensor x 1	
ID Setting	NONE	DIP switch setting
Comm. Baudrate	NONE	19,200 bps-N-8-1
LED Indicator	Power / Comm.	
Beep Tone	Buzzer	
Ingress Protection	IP 65	
Power Input	DC 12V / 1A	
Current Consumption	200mA (max)	
Operating Temp.	-10°C~ 70°C / 14°F~ 158°F	
Relative Humidity	20% ~ 80%(Non-condensing)	
Dimension (LxWxH)(mm)	120 x 77 x 22	